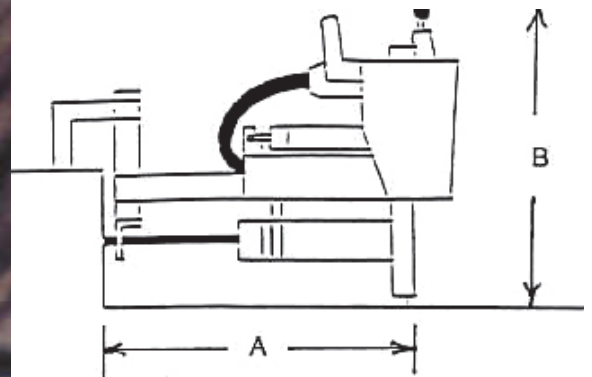


Specifications >>**Model 65B**

	Horizontal Position >>	Vertical Position >>
Lower Length w/8" dd (A)	24" (60.9 cm)	N/A
Lower Length w/12" dd(A)	30" (76.2 cm)	N/A
Width	12" (30.5 cm)	
Height (B)	22" (55.9 cm)	N/A
Weight	65 lbs (29.5 kg)	
Drill distance from corner	6" (15.2 cm)	N/A
Drill distance from ground	1" (2.5 cm)	up to 6" (15.2 cm)
Drill depth (std.)	8" to 12" (20.3 cm to 30.5 cm)	
Drill bit diameter	1/2" to 7/8" (12.7 mm to 22.2 mm)	
Drill motor (pneumatic)	CP 9C	
Weight	8 lbs (3.63 kg)	
Chuck size (std.)	3/4" x 3 3/4" (19.1 mm x 95.3 mm)	
Air consumption (minimum)	20 cfm (.56 m3/min)	
Operating pressure	80 psi (5.5 bar)	
Impact (ft. lbs./blow)	3.5 fpb (4.8 J)	
Blows/minute	3400 bpm	
Rotations/minute	180 rpm	

*Specifications subject to change without notice.